


AUTOMATIC WATER SOFTENER MAXI VOLUMETRIC



WATER NETWORK CONNECTIONS

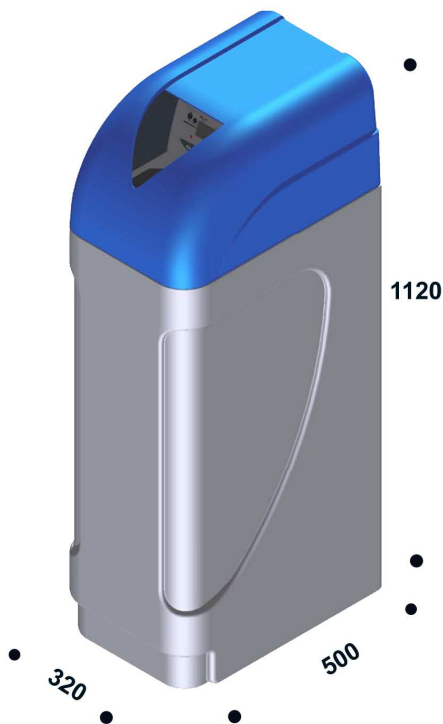

TECHNICAL DATA

| | |
|--|---|
| Weight | 32 Kg |
| Power supply | standard 230V 50/60 Hz optional 120V 60 Hz |
| Maximum flow rate | 1500 l/h |
| Room temperature | 4°C -30°C |
| Power requirement | 4 W |
| Regeneration salt amount | 2.7 kg |
| Maximum salt content in the brine tank | 50 kg |

SUPPLY WATER CHARACTERISTICS

| | |
|-----------------------------|---------------|
| Drinking water | |
| Crystal-clear water (SDI 1) | |
| Temperature | 4°C-25°C |
| Pressure | 2 bar - 8 bar |
| Maximum hardness | 90 °f |

1 WATER SOFTENER CONSISTING OF:

- 1 brine tank
- 1 Autotrol 255/760 volumetric Logix valve
- 1 cylinder of 24 litres holding 17 litres of cationic resins adapt for softening
- 1 instruction manual
- 3 m of unloading pipe:
- 1 overflow curved union joint
- 1 fitting for the unloading pipe
- 1 chlorine generator (OPTIONAL)

PRODUCT CODE:

- AMAX22 with connections 1/2"G
- AMAX33 with connections 1"G mixer
- AMAX55 with connections 3/4"G mixer

THE WATER SOFTENER IS SUITED FOR:



| LITRES OF SOFTENED WATER ACCORDING TO ITS HARDNESS | | | | | | |
|--|------|------|------|------|------|--------------------------------------|
| °f | 20 | 30 | 40 | 50 | 60 | CYCLIC CAPACITY [m ³ ·°f] |
| °d | 11 | 16 | 22 | 28 | 33 | |
| ppm CaCO ₃ | 200 | 300 | 400 | 500 | 600 | |
| | 5040 | 3360 | 2520 | 2016 | 1680 | 101 |